


EAPC MIDDLE EAST

Nov. 2000 – Feb. 2001

Pile Diameter's Range from 406mm – 1219mm



Underwater Pile Cleaning Operations

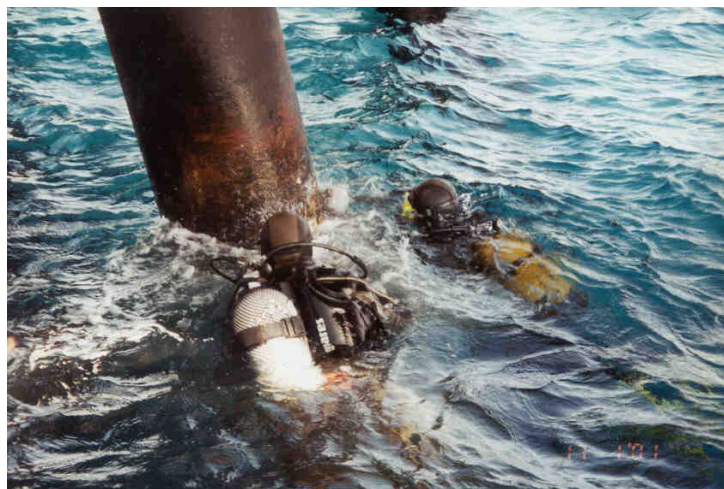

Diver working on the surface, hand scraping
marine growth



Diver using air driven "Whirlaway" to final clean pile



Self propelled work platform. Note wrap on deck, folded ready for installation - factory fitted fasteners clearly visible



Wrap lowered into position using grab handles. Note inner sealing face of flange clearly visible



Line up rod being fitted



Tightening top caliper



Line up rod and top caliper in position




Second caliper being handed to diver



Underwater tensioning operation in progress



Inshore pile cleaning underway

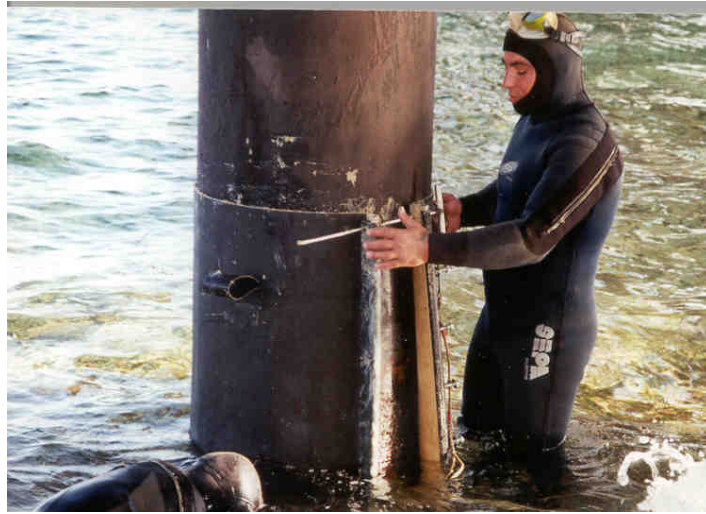

Fitting line up rod into flanges
Note sealing faces and grab handle clearly visible



Wrap secured in place in surf



Tensioning operation in progress



Wrap fully installed. Note: grab handle will be removed at this location



Installed wrap on vertical and batter piles



Finished structure



Large diameter one-piece wraps on mooring dolphin
Note center wrap installed with less than 10" (250mm)
clearance to outer piles



Complete assembly
Jetty No. 1 in background

Corrosion Control International (Division of Slickbar Products Corporation)
18 Beach Street; Seymour, CT 06483 USA
Ph: 203-888-7662 Fax: 203-888-7720
Email: info@corrosioncontrol.com; Web: www.corrosioncontrol.com