

# SLICKBAR®


*World Leaders in Oil Spill Control Technology . . . Since 1960*

## Mk 8 Heavy Duty Permanent Containment Boom

The Mk 8 is a heavy-duty boom engineered specifically for permanent installations. Its strength, deep skirt, high freeboard and reserve buoyancy flotation give it extraordinary effectiveness under adverse conditions.

The Mk 8 is a high technology boom engineered for long service life, easy field maintenance, better spill control and ease of recovery.

It is available in 24" (61cm), 36" (91 cm), 48" (122cm) overall heights and in increments of 50' (15m) or 100' (30m) section lengths.

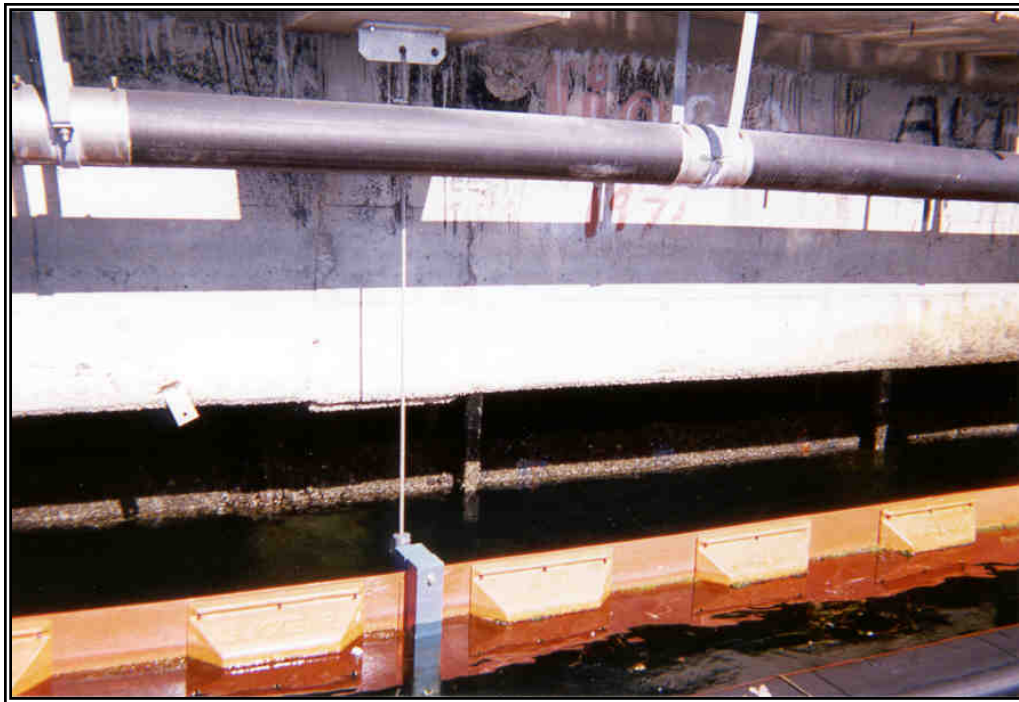

**SLICKBAR PRODUCTS CORPORATION**  
18 Beach Street Seymour, CT 06483 Ph: (203) 888-7700 • 1-800-322-2666 • FAX: (203) 888-7720  
Email: [info@slickbar.com](mailto:info@slickbar.com) • [www.slickbar.com](http://www.slickbar.com)

# SPECIFICATIONS

FEATURES	Mk 8-24"	Mk 8-36"	Mk 8-48"
<b>DIMENSIONS (overall)</b>	24" (609mm)	36" (914mm)	48" (1219mm)
<b>FREEBOARD</b>	8" (203mm)	8" (203mm)	12" (305mm)
<b>DRAFT</b>	16" (406mm)	28" (711mm)	36" (914mm)
<b>WEIGHT lbs./ft. (kg/m)</b>	4.6 lb/ft (6.9 kg/m)	5.5 lb/ft (8.3 kg/m)	7.5 lb/ft (11.3kg/m)
<b>BALLAST</b>	Self riveted lead weights	Self riveted lead weights	Self riveted lead weights
<b>COLOR FLOTATION</b>	Orange or Yellow	Orange or Yellow	Orange or Yellow
<b>COLOR FABRIC</b>	Orange	Orange	Orange
<b>TOTAL STRENGTH</b>	32,000 (144,000N)	51,200 (230,400N)	64,800 (14016N)
<b>FABRIC TENSILE STRENGTH</b>	1,600 (14,106N)	1,600 (14,016N)	1,600 (14016N)
<b>BUOYANCY-TO-WEIGHT</b>	8.4 (12.6)	8.3 (12.5)	8.3 (12.5)
<b>TOW SPEED (straight line)</b>	10 k	10k	10k
<b>TOW SPEED (sweep mode)</b>	1k	1k	1k
<b>OPERATING ENVIRONMENT</b>	C	C	C
<b>PERSONNEL REQUIRED</b>	2	2	2

**FLOTATION:** Molded external foam 24" (609mm) long x 10.5" (267mm) high with splash guard handle and stainless steel mounting hardware

**FABRIC:** 80 oz. or 100 oz. Urethane coated polyester or 175 oz. PVC

**CONNECTORS:** ASTM F-962, Universal Slide or USN style connectors all coated for corrosion protection

**BALLAST:** Lead Ballast Weights hardened with antimony